

"Stay Connected" with



HEYware Products

a PennEngineering® Company




HEYClip™ MaxRunner® Cable Clip Arrays

Clip Mount or Flush Mount with Screws, accommodates up to **12 Cables**

- **Hold up to 12 cables** with wire diameters ranging from .20" (5,2 mm) to .28" (7,2 mm).
- Patented design is the ultimate multiple strand wire management.
- Molded internal locking tabs securely hold the cables in place preventing side-to-side movement or slippage of the cables.
- Constructed from PPE+PS flame retardant "Noryl" material with a V-0 flame rating and a UV (f1) rating for excellent resistance to outdoor exposure.
- **Clip Mount** features a versatile, 301 stainless steel mounting clip.
- Clip is designed to secure the holder to a wide variety of aluminum extruded mounting rails of various profiles with thicknesses up to .250" (6,4 mm).
- **Flush Mount** designed to mount on flat panels or extrusions without mounting ledges.
- Easily attaches to any flat surface with four mounting screws.
- Recommended spacing is 4 feet.
- Load Rating not to exceed 15 lbs.
- US Patent No. 8950712B2

| PANEL THICKNESS CLAMPING RANGE | | WIRE DIA. RANGE | | PART NO. | DESCRIPTION | FOOTPRINT | | OVERALL HEIGHT | | | |
|--------------------------------|---------|-----------------|---------|-----------|-------------|--------------|--------------------------|----------------|-------------|------|------|
| Minimum | Maximum | Minimum | Maximum | | | in. | mm. | in. | mm. | | |
| Clip Mount | | | | | | | | | | | |
| .06 | 1,5 | .25 | 6,4 | .20 - .28 | 5,2 - 7,2 | S6403 | MaxRunner 12 Clip Mount | 3.00 x 3.13 | 76,2 - 79,5 | .98 | 24,9 |
| Flush Mount* | | | | | | | | | | | |
| N/A: designed for flat mount | | | | .20 - .28 | 5,2 - 7,2 | S6433 | MaxRunner 12 Flush Mount | 3.00 x 3.13 | 76,2 - 79,5 | 1.00 | 25,4 |

*Screws not included

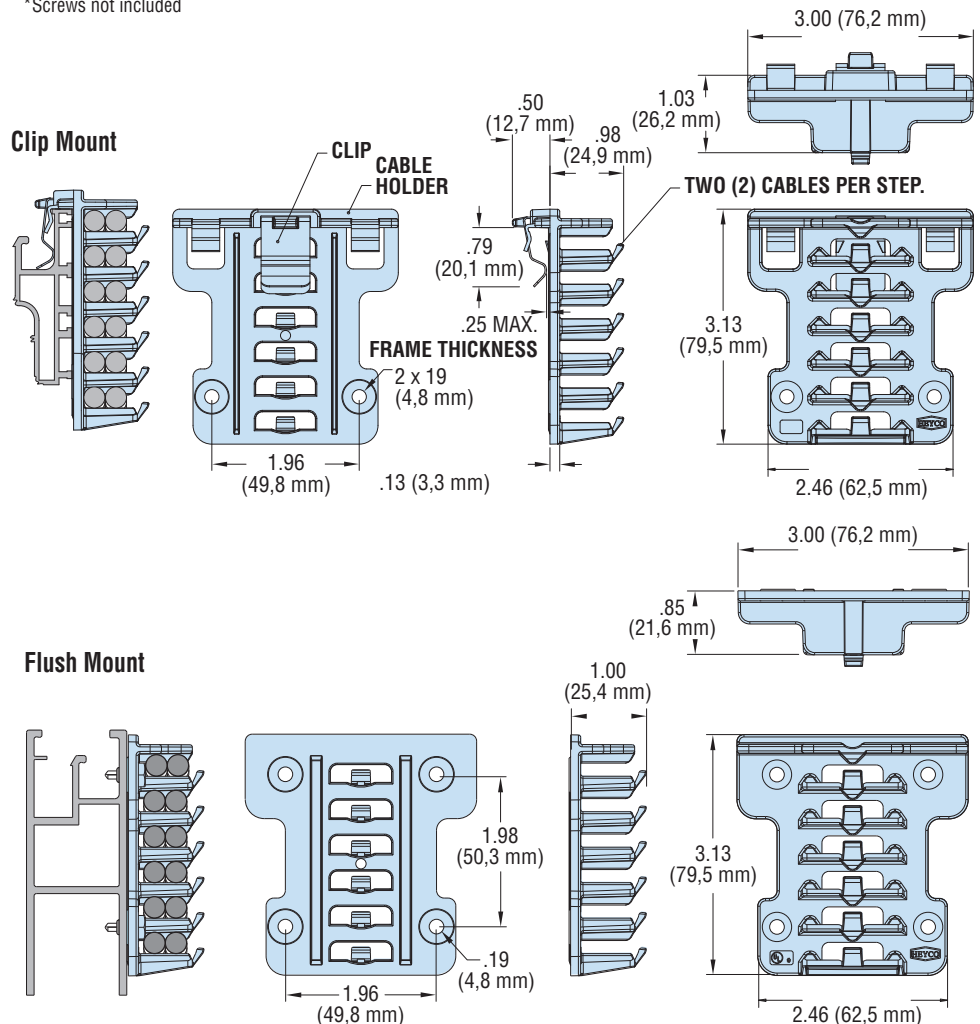

Quick Specs

Materials
Certifications



PPE & PS Noryl (Clip Mount includes a 301 stainless steel mounting clip)
Certified by UL for Compliance with both Canadian and U.S. requirements under File E54523

Flammability Rating
Temperature Range

94V-0
-40°F (-40°C) to 203°F (95°C)



Rubber Products Distributors 317-883-6700 rubbergrommets.com