

“Stay Connected” with



Bushings, Grommets, HEYcaps & Plugs

a PennEngineering® Company



- **Molded from a nylon material which, in the event of a fire, will not burn and will not produce toxic gases.** Also formulated for sunlight resistance. Other Heyco products are available in this material—please consult Heyco.
- Close unneeded panel holes.
- Quick and easy installation.
- Convex, matte finish head tapers to a thin edge (Except HFP-187 glossy finish).
- Lock firmly into panel up to .125" (3,2 mm) thick.
- Locking fingers in fractional increments up to the maximum panel thickness.
- Approximate Head Thickness: .062" (1,6 mm). Thickness may vary.
- Multiple sizes for use in .187" (4,7 mm) to 2.000" (50,8 mm) diameter holes. Consult Heyco for larger sizes.

Heyco® Halogen and Phosphorus-Free 94V-0 Hole Plugs

Heat Stabilized • Self Extinguishing • Nontoxic • UV Resistant

Mounting Hole Diameter Range: .187" (4,7 mm) to 2.000" (50,8 mm)

MOUNTING HOLE DIAMETER		PART NO. Black	DESCRIPTION	PART DIMENSIONS			
in.	mm.			A Head Diameter		B Overall Height	
				in.	mm.	in.	mm.

Single Locking Step for Panel Thickness up to .062" (1,6 mm)

.187	4,7	2593	HFP 187*	.25	6,4	.24	6,1
.250	6,4	2606	HFP 250	.31	7,9		
.312	7,9	2616	HFP 312	.38	9,5	.31	7,9


Multiple Locking Steps for Panel Thickness up to .125" (3,2 mm)

.375	9,5	2623	HFP 375	.47	11,9	.41	10,3
.437	11,1	2636	HFP 437	.53	13,5		
.500	12,7	2646	HFP 500	.58	14,7		
.625	15,9	2666	HFP 625	.72	18,2		
.750	19,1	2686	HFP 750	.92	23,4	.45	11,5
.875	22,2	2706	HFP 875	1.02	25,8		
1.000	25,4	2716	HFP 1000	1.20	30,6		
1.093 - 1.125	27,8 - 28,6	2729	HFP 1093	1.22	30,9		
1.250	31,7	2749	HFP 1250	1.38	34,9	.47	11,9
1.375	34,9	2759	HFP 1375	1.50	38,1		
1.500	38,1	2769	HFP 1500	1.69	42,8		
1.750	44,5	2779	HFP 1750	1.92	48,7		
2.000	50,8	2789	HFP 2000	2.17	55,1		


Multiple Locking Steps for Panel Thickness up to .250" (6,4 mm)

.500	12,7	3004F	HFPT 500	.58	14,7	.56	14,3
.625	15,9	3006F	HFPT 625 *	.73	18,5	.52	13,2
.750	19,1	3008F	HFPT 750 *	.91	23,1	.56	14,3
.875	22,2	3044F	HFPT 875	1.02	25,8		
1.000	25,4	3046F	HFPT 1000	1.20	30,6		
1.093- 1.125	27,8- 28,6	3018F	HFPT 1093	1.22	30,9		
1.250	31,7	3102F	HFPT 1250	1.38	34,9	.58	14,7
1.375	34,9	3106F	HFPT 1375	1.50	38,1		
1.500	38,1	3048F	HFPT 1500	1.67	42,4		
1.750	44,5	3027F	HFPT 1750	1.91	48,4		
2.000	50,8	3050F	HFPT 2000	2.17	55,1		

Standard color black.
*Convex, glossy finish head.

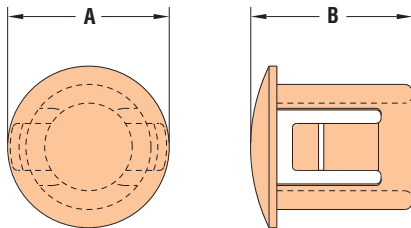

SINGLE PANEL THICKNESS DESIGN

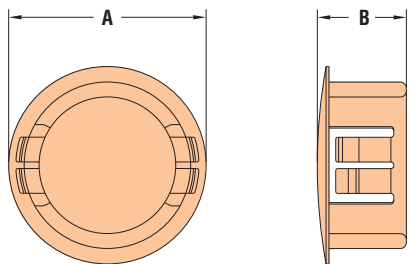

MULTIPLE PANEL THICKNESS DESIGN

Quick
Specs

Material
Certifications

Nylon 6/6
 Recognized under the Component Program of Underwriters' Laboratories File E51579

Flammability Rating
Temperature Range

Certified by the Canadian Standards Association File 8919
 94V-0
 -40°F (-40°C) to 221°F (105°C)