

"Stay Connected" with



HEYware Products


a PennEngineering® Company



HEYClip™ Nylon Arrow Clips

Maximum Assembled Panel Sequence

- **Hollow body design** allows the clip to compress through the mounting hole, then expand back to original shape to lock assembled components securely.
- May be disassembled and reused.
- Offer a low cost way to assemble metal, plastic, composite, wood, and other thin gauge materials.
- Snap into mounting holes with fingertip pressure—no tools required.
- Vibration, abrasion, and corrosion resistant.

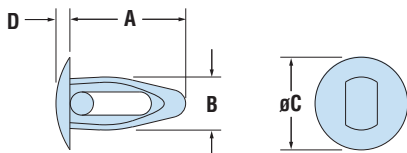

AC/ACT Series

ASSEMBLED PANEL THICKNESS RANGE				MOUNTING HOLE DIAMETER RANGE				PART NO.		DESCRIPTION	PART DIMENSIONS							
Maximum		Minimum		Maximum		Minimum		Natural	Black		A		B		C		D	
in.	mm.	in.	mm.	in.	mm.	in.	mm.				Length	Clip Dia.	Head Dia.	Head Height	in.	mm.	in.	mm.
AC Series For combined Panel Thickness ≤ .250" (6,4 mm)																		
.10	2,5	.04	1,0	.190	4,8	.180	4,6	0325	0325B	AC 1996	.45	11,4	.22	5,5	.36	9,1		
				.122	3,1	.118	3,0	0315	0315B	AC 15	.39	9,9	.15	3,8			.06	1,5
				.135	3,4	.130	3,3	0302	0302B	AC 2	.38	9,7	.16	4,1	.28	7,1		
				.165	4,2	.160	4,1	0318	0318B	AC 18 *	.40	10,2	.19	4,7	.28	7,1	.08	2,0
.13	3,2	.06	1,6	.192	4,9	.182	4,6	0301	0301B	AC 1	.42	10,5	.23	5,7	.36	9,1		
				.212	5,4	.192	4,9	0328	0328B	AC 28	.45	11,4	.24	6,0	.38	9,5		
				.223	5,7	.213	5,4	0307	0307B	AC 7	.45	11,4	.22	5,6	.37	9,4		
.14	3,6	.13	3,2	.132	3,4	.130	3,3	0313	0313B	AC 13	.32	8,1	.16	4,1	.28	7,1	.06	1,5
.15	3,7	.06	1,6	.161	4,1	.151	3,8	0304	0304B	AC 4	.40	10,2	.18	4,6				
.16	4,1	.06	1,6	.223	5,7	.213	5,4	0305	0305B	AC 5	.52	13,2	.25	6,3	.37	9,4		
		.17	4,2	.192	4,9	.182	4,6	0311	0311B	AC 11	.52	13,2	.21	5,2				
.19	4,7	.06	1,6	.223	5,7	.213	5,4	0326	0326B	AC 1668	.49	12,5	.25	6,3	.63	15,9	.10	2,5
		.13	3,2	.260	6,6	.250	6,4	0309	0309B	AC 9	.58	14,6	.29	7,4	.48	12,3	.07	1,8

ACT Series For combined Panel Thickness > .250" (6,4 mm)																		
.30	7,6	.29	7,4	.150	3,8	.145	3,7	0314	0314B	ACT 14	.53	13,5	.20	5,0	.27	6,9		
.34	8,6	.06	1,6	.335	8,5	.320	8,1	0317	0317B	ACT 17	.90	22,9	.38	9,5	.68	17,3	.07	1,7
.38	9,7	.36	9,1	.260	6,6	.250	6,4	0316	0316B	ACT 16	.81	20,6	.28	7,0	.61	15,5		


Standard color natural. Consult Heyco for black and other colors.
 *AC 18 minimum panel thickness is .03" (0,8 mm), head height is .08" (2,0 mm)



HEYClip™ Shorty Mounting Buttons



- Webbed body design for stronger retention force.
- Part description: HMB X-Y where X = average Mounting Hole Diameter (inches) and Y = average Assembled Panel Thickness.



HMB Series

ASSEMBLED PANEL THICKNESS RANGE				MOUNTING HOLE DIAMETER RANGE				PART NO.		DESCRIPTION	PART DIMENSIONS							
Maximum		Minimum		Maximum		Minimum		Natural	Black		A		B		C		D	
in.	mm.	in.	mm.	in.	mm.	in.	mm.				Length	Clip Dia.	Head Dia.	Head Height	in.	mm.	in.	mm.
.08	2,1	.06	1,5	.126	3,2	.122	3,1	4138	-	HMB 124-07	.24	6,0	.13	3,4	.28	7,0	.05	1,2
.14	3,5	.08	2,0	.126	3,2	.118	3,0	4139	-	HMB 122-11	.32	8,3	.14	3,5	.29	7,4	.06	1,4
.10	2,5	.08	2,0	.127	3,2	.122	3,1	4199	4199B	HMB 125-09	.33	8,4	.09	2,2	.28	7,1	.05	1,2
		.11	2,9	.141	3,6	.131	3,3	4200	4200B	HMB 136-13.5	.44	11,1	.13	3,2	.41	10,3	.07	1,7
.16	4,0	.10	2,5	.192	4,9	.181	4,6	4201	4201B	HMB 187-13	.43	10,9	.16	4,0	.50	12,7	.09	2,2
.25	6,4	.13	3,2	.260	6,6	.250	6,4	0321	0321B	HMB 255-19	.63	16,0	.28	7,1	.50	12,7	.05	1,3
.33	8,4	.31	7,9	.192	4,9	.182	4,6	0306	0306B	HMB 187-32	.55	14,0	.23	5,7	.38	9,7	.06	1,5
.75	19,1	.50	12,7	.260	6,6	.250	6,4	0324	0324B	HMB 255-62.5	1.14	28,8	.29	7,3	.61	15,5	.07	1,7

Standard color natural and black except for Part Nos. **4138** and **4139**

Quick Specs

Material: Nylon 6/6
 Flammability Rating: 94V-2
 Temperature Range: 32°F (0°C) to 185°F (85°C)