

“Stay Connected” with



Power Components

a PennEngineering® Company

## Heyco® Heavy Duty Ring and Spade Terminals

For Heyco Applicators, see page 8-59


- **Three up** and **two up** applicators allow operators to attach multiple terminals at once.
- .0315" and .040" gauge material.
- Available in strip form only.
- HD Spade features **90° bend** to lock screw in place.
- DFARS Compliant

Insulation Crimp?	PART DATA			PART NO.	APPLICATION TOOLING *				
	Hole Dia. in.	AWG Range	Material		Die **	Feed	Parts per Feed	Crimp Punch	Anvil
<b>Heavy Duty Ring Terminals</b>									
No	.265	12-8	Brass	<b>6072</b> <b>6073</b>	6072SXX5 6073SXX5	Rear Rear	3 2	0W29, 0W46, 0W48	0W28, 0W45, 0W47
No	.265	8-6	Brass	<b>6070</b> <b>6071</b>	6070SXX5 6071SXX5	Rear Rear	3 2	0W29, 0W49	0W28
<b>Heavy Duty Spade Terminals</b>									
No	.265	12-8	Brass	<b>6082</b> <b>6083</b>	6082SXX5 6083SXX5	Rear Rear	3 2	0W29, 0W46, 0W48	0W28, 0W45, 0W47
No	.265	8-6	Brass	<b>6080</b> <b>6081</b>	6080SXX5 6081SXX5	Rear Rear	3 2	0W29, 0W49	0W28


\* Use the Heyco Standard Applicator Die (indicated by "S" in the Die Part No.), page 8-59.

\*\* "XX" represents Wire Gauge. Please specify Wire Gauge when ordering.

HD Ring

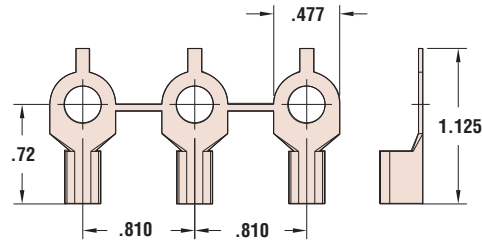

HD Spade

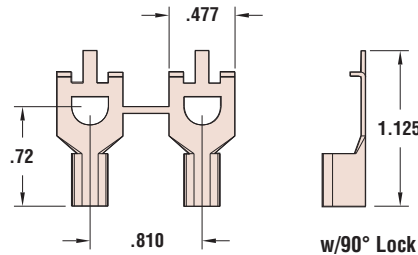

Quick Specs

Material  
Certifications

Alloy 260 Brass (70% Cu, 30% Zn. Higher Cu content resists dezincification)  
UL Listed under Underwriters' Laboratories File E95474