

"Stay Connected" with



Strain Relief Bushings

a PennEngineering® Company



LSR 1939-300


- **Assembly friendly!** Independent of insertion into the panel, LSR 1939-300 **self-locks** onto the cable. Preassemble off line for final assembly at a later time or remote location, for lower installed cost!
- Large mounting hole design allows passage of plugs or bulky assemblies during installation.
- Passes UL pull-out test requirements with or without panel support.
- Protects the lifeline of your electric/electronic products by absorbing the forces of push and pull that may be exerted on the flexible power cord.
- Rectangular design eliminates the possibility of part rotation under forces of twist.

Heyco® Multi-Lockit™ Strain Relief Bushing

For Round and Flat Cables

| UL Type | WILL FIT THESE CABLES | | | PANEL DIMENSIONS | | | | PART NO. | DESCRIPTION |
|------------------------|-----------------------|------------------|-------------|-----------------------|-------------|-----------|-----|----------|--------------|
| | AWG/ Conductors | Approximate Size | | Mounting Hole Size | | Thickness | | | |
| | | in. | mm. | in. | mm. | in. | mm. | Black | |
| Round Cable | 18/3 | .250 | 6,4 | 1.142 x 1.142 | 29,0 x 29,0 | .032 | 0,8 | 1843 | LSR 1939-300 |
| Flat Cable SPT-3 | | .173 x .380 | 4,39 x 9,65 | | | | | | |

Standard color black. Consult Heyco for white and other colors.

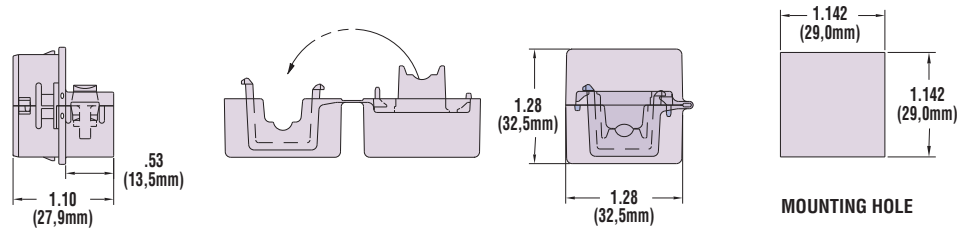

ST 101A


- Designed to be installed in a U shape panel slot (see schematic). Securely anchors, insulates, and protects cables at panel entry point. Slim head profile makes ST 101A design-specific.
- Heyco's automated Pre-Assembly Equipment speeds assembly of the Lockit onto the cable and thus lowers costs while greatly reducing risk of carpal tunnel syndrome. See pages 4-15 & 4-16.
- Consult Heyco for other wire types and sizes.

Heyco® ST Lockit™ Strain Relief Bushing for U-Shape Slot

For Round and Flat Cables

| UL Type | WILL FIT THESE CABLES | | | PANEL DIMENSIONS | | | | PART NO. | DESCRIPTION |
|----------|-----------------------|------------------|-----|-----------------------|-------------|-----------|-----|----------|-------------|
| | AWG Conductors | Approximate Size | | Mounting Hole Size | | Thickness | | | |
| | | in. | mm. | in. | mm. | in. | mm. | Black | |
| SV & SVT | 18/2 | .220 | 5,6 | .453 x .512 | 11,5 x 13,0 | .062 | 1,6 | 1839 | ST 101A |
| | | .245 | 6,2 | | | | | | |
| | 18/3 | .250 | 6,4 | | | | | | |
| .255 | | 6,5 | | | | | | | |
| HPD | 18/2 | .270 | 6,9 | | | | | | |
| | 16/2 | .290 | 7,4 | | | | | | |

Standard color black. Consult Heyco for white and other colors.

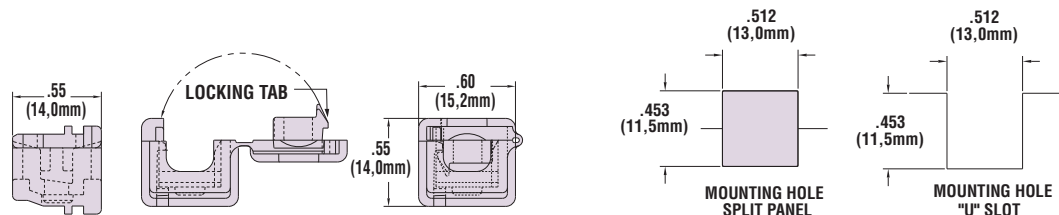

Quick Specs

| | |
|---------------------|--|
| Material | Nylon 6/6 |
| Certifications | UL Recognized under the Component Program of Underwriters' Laboratories File E15331 CS Canadian Certified by Canadian Standards Association File 8919 |
| Flammability Rating | 94V-2 |
| Temperature Range | -04°F (-18°C) to 221°F (105°C) |