

"Stay Connected" with

HEYCO®

Power Components

a PennEngineering® Company

Heyco® PCB Contacts

PCB Blade, Pins, and Female Connectors








PART DATA					PART NO.			FEEDS
Type	Dimensions in. mm.		For Maximum PCB Thickness in. mm.		Material	Non- polarized	Polarized	
Blades								
Snap-thru	.847 21,5		.047 1,2		Brass	5200	5201	Bulk
	1.030 26,1		.078 2,0		Brass	8179	—	
Pins*								
Snap-Thru	.187 4,7		.047 1,2		Brass	5940	—	Bulk
	.187 4,7		.047 1,2		Brass	5907	—	Bulk
Length								
Female	1.00	27,4	Rivet Mount†		Brass	7347	—	Bulk
1155-90 Female**								
Wiping Contact 90°	.790	20,6	.047 1,2		Brass	7261	—	Bulk


*For additional Heyco Specialty Pins, see page 8-42.

**For additional Heyco Female Cord Connectors, see page 8-50.

† .160" (4,1 mm) mounting hole.

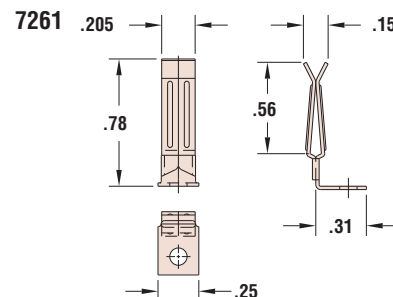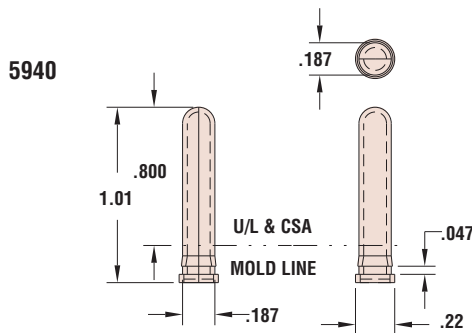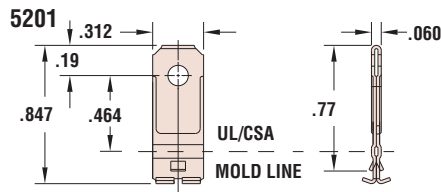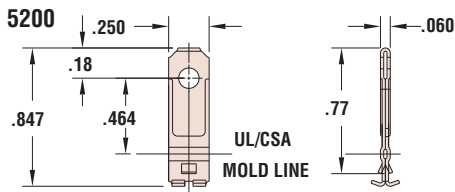

- Designed for printed circuit board applications when **connection to AC power is required**.
- Can be used for either NEMA 1-15 or 5-15 applications.
- **Part Nos. 5200 and 5201** are full wide designed for added support when attached to the printed circuit board.
- For our complete line of stamped Power Components, see Section 8.
- For our complete line of Nylon PCB Supports, see section 7.
- DFARS Compliant

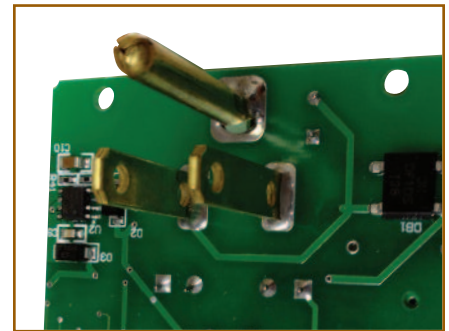

Materials

Alloy 260 Brass (70% Cu, 30% Zn)

*Quick
Specs*