

"Stay Connected" with

HEYCO®

Strain Relief Bushings





a PennEngineering® Company

Heyco® Nylon Removable Snap-In Ratcheting Strain Reliefs

For Round and Double D Mounting Holes


WILL FIT THESE CABLES			PANEL DIMENSIONS				PART NO.	DESCRIPTION	BODY LENGTH		Corresponding Mounting Hole Plug	
Cross Section	Approximate Size		Mounting Hole Size		Maximum Thickness				Black	in.	mm.	PART NO.
	in.	mm.	in.	mm.	in.	mm.						
Round, Flat or Multiple	.12-.58	2.9-14,6	.875 w/.770 flats	22,2 w/19,6 flats	.13	3,2	1280	RSR 875	1.00	25,4	2509	DD 875 -770
Round, Flat or Multiple	.12-.75	2.9-19,1	1.109 w/1.000 flats	28,2 w/25,2 flats	.13	3,2	1282	RSR 1109	1.00	25,4	2717	DD 1109 -1000

Standard color black. Consult Heyco for white and other colors.

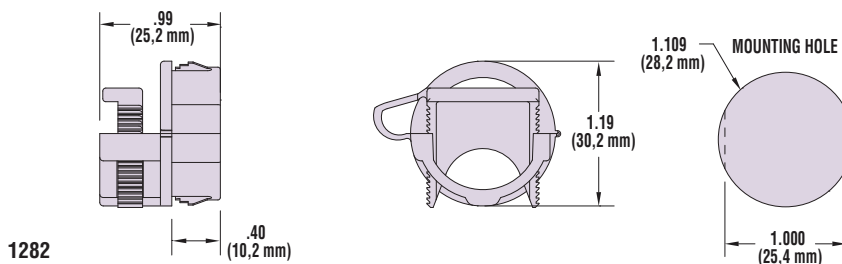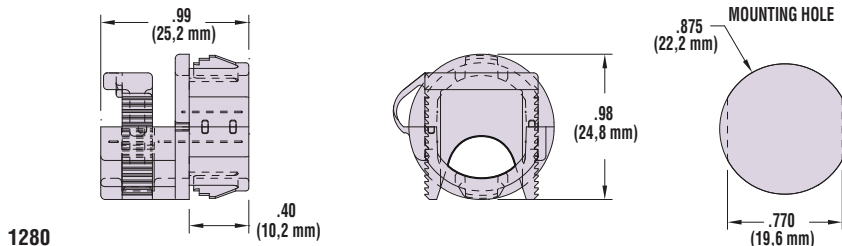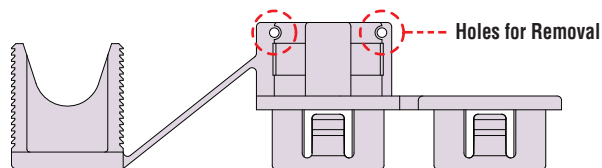

- **Assembly friendly!** Independent of insertion into the panel, the Ratcheting Strain Relief **self-locks** onto the cable. Thus, it may be preassembled offline for final assembly at a later time or remote location, for lower installed cost!
- Unique wire locking ratchet allows for generous wire range from .12" (2,9 mm) to .75" (19,1 mm).
- Can be used for one cable or multiple cables (round or flat wire).
- Installs easily with fingertip pressure into a standard round or Double D hole.
- Ratcheting Strain Relief can be easily removed by inserting standard snap ring pliers with .04" tips (Heyco PN 0054) into the two holes on the part (see drawing) and spreading part open.
- Ideal solution for managing internal wire bundles such as wire harnesses.
- PN 1280 UL Recognized for multiple cables/conductors.
- Consult Heyco for other wire types and sizes.
- For Double D Mounting Hole Punches, see page 4-30.

PN 0054

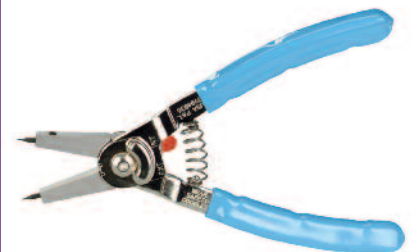

Material
Certifications

Nylon 6/6
Recognized under the Component Program of Underwriters' Laboratories File E15331
Certified by Canadian Standards Association File 8919

Flammability Rating
Temperature Range

94V-2
-04°F (-18°C) to 221°F (105°C)

*Quick
Specs*