

“Stay Connected” with



Bushings, Grommets, HEYcaps & Plugs

a PennEngineering® Company




Consult Heyco for Window Tints Other Than Clear

## Heyco® Window “View Port” Plugs

Mounting Hole Diameter Range: .187” (4,7 mm) to 2.000” (50,8 mm)

- Molded of **transparent** polycarbonate for internal viewing or light transmission.
- Snap into mounting holes with fingertip pressure—no tools required.
- Multiple sizes for use in .187” (4,7 mm) to 2.000” (50,8 mm) diameter holes.
- Lock firmly into panel up to .125” (3,2 mm) thick.
- Locking fingers in fractional increments up to the maximum panel thickness.
- Approximate Head Thickness: .062” (1,6 mm). Thickness may vary.
- **Available in a variety of tints –consult Heyco.**

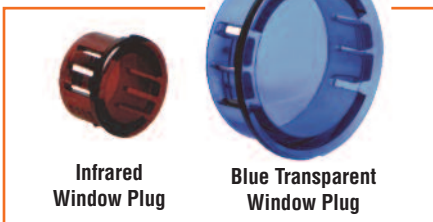


Infrared Window Plug



Blue Transparent Window Plug

MOUNTING HOLE DIAMETER		PART NO.	DESCRIPTION	PART DIMENSIONS			
in.	mm.			Clear*	A Head Diameter		B Overall Height
				in.	mm.	in.	mm.
Single Locking Step for Panel Thickness up to .062” (1,6 mm)							
.187	4,7	<b>1300</b>	WP 187	.25	6,4	.23	5,9
.250	6,4	<b>1301</b>	WP 250	.31	7,9	.31	7,9
.312	7,9	<b>1302</b>	WP 312	.38	9,5		
Multiple Locking Steps for Panel Thickness up to .125” (3,2 mm)							
.375	9,5	<b>1303</b>	WP 375	.47	11,9	.41	10,3
.437	11,1	<b>1304</b>	WP 437	.53	13,5		
.500	12,7	<b>1305</b>	WP 500	.56	14,3		
.625	15,9	<b>1307</b>	WP 625	.73	18,6		
.760	19,3	<b>1309</b>	WP 750	.86	21,8	.45	11,5
.875	22,2	<b>1311</b>	WP 875	.95	24,2		
1.000	25,4	<b>1312</b>	WP 1000	1.13	28,6		
1.093 - 1.125	27,8 - 28,6	<b>1313</b>	WP 1093	1.22	30,9		
1.375	34,9	<b>1314</b>	WP 1375	1.50	38,1		
1.500	38,1	<b>1316</b>	WP 1500	1.62	41,2		
1.750	44,5	<b>1318</b>	WP 1750	1.90	48,3		
2.000	50,8	<b>1319</b>	WP 2000	2.16	54,8		

\*Consult Heyco for Window Plugs in tinted colors.



SINGLE PANEL THICKNESS DESIGN



MULTIPLE PANEL THICKNESS DESIGN



- Matte Finish diffuses light from source behind plug.

## Heyco® Diffuser Plugs

MOUNTING HOLE DIAMETER*		PART NO.	DESCRIPTION	PART DIMENSIONS			
in.	mm.			Matte	A Head Diameter		B Overall Height
				in.	mm.	in.	mm.
Multiple Locking Steps for Panel Thickness up to .125” (3,2 mm)							
.375	9,5	<b>1303D</b>	DWP 375	.47	11,9	.41	10,3
.760	19,3	<b>1309D</b>	DWP 750	.92	23,4		
1.000	25,4	<b>1312D</b>	DWP 1000	1.13	28,6	.45	11,5
2.000	50,8	<b>1319D</b>	DWP 2000	2.16	54,8		

\*Consult Heyco for other mounting hole diameters.

Material	Polycarbonate
Flammability Rating	94V-2
Temperature Range	-40°F (-40°C) to 239°F (115°C)

Quick Specs